

Waterstop HyDra Elastomer A corner type A



PRODUCT SPECIFICATION

Waterstop HyDra Elastomer construction joint series A corner A according to DIN 7865, part 1 and 2 is a permanently flexible sealing profile made of elastomer, SBR or EPDM, that is used to seal construction joints in waterproof concrete structures with high water pressures.

Characteristics / Advantages

- high tensile strength and elongation at break
- high permanent flexibility and high-load bearing capacity
- suitable for water pressure
- resistant to all natural media acting aggressively to concrete
- resistant to a wide range of chemical substances (tests required for each additional specific situation)
- resistant to bitumen
- supply of systems for easy handling on site
- vulcanizable by using butt joints on site

Application

- joint sealing in concrete structures
- construction joint sealing system for in-situ concrete

Typical structures

- commercial buildings, cellars, bridges, trough and bridge constructions
- rail tunnels and road tunnels
- water construction plants

Waterstop HyDra Elastomer A corner type A



Standards / Directives

- DIN 18197
- DIN 7865, part 2
- WU- Directives DAfStb
- ZTV-ING, Riz-Ing
- Vulcanizing instructions

Test certificate / Approvals

- latest manufacturer's test certificate
- certificate of conformity - DIN 7865
- external monitoring by MPA NRW
- internal monitoring

PRODUCT DATA

Material

- SBR elastomer (styrene butadiene rubber)
- EPDM elastomer (ethylene-propylene-diene monomer)

Colour

- black

Packaging

- supplied as standard rolls (25 m), pre-cut parts and systems

Waterstop

HyDra Elastomer A corner

type A


MECHANICAL PROPERTIES

according to DIN 7865, part 2



Shore A hardness	62 ± 5
Tear strength	$\geq 10 \text{ MPa}$
Elongation at break	$\geq 380 \%$
Compression set	168h / 23°C $\leq 20\%$ 24h / 70°C $\leq 35\%$
Tear propagation resistance	$\geq 8 \text{ kN/m}$
Performance after heat ageing	Shore A hardness change ≤ 8 Tear strength $\geq 9 \text{ MPa}$ Elongation at break $\geq 300\%$
Low temperature performance	$\leq 90 \text{ Shore A}$
Tension set	$\leq 20\%$
Performance after conditioning in hot bitumen	Residual deformation $< 20\%$ Tear strength $\geq 7 \text{ MPa}$ Elongation at break $\geq 300\%$
Performance after ozone ageing	No cracks

Waterstop HyDra Elastomer A corner type A

A 250 corner A

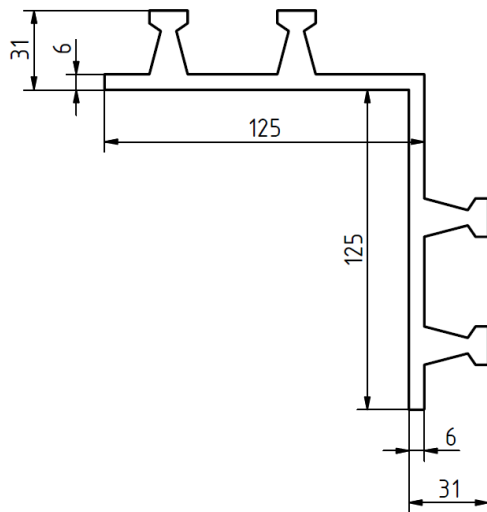

A 350 corner A

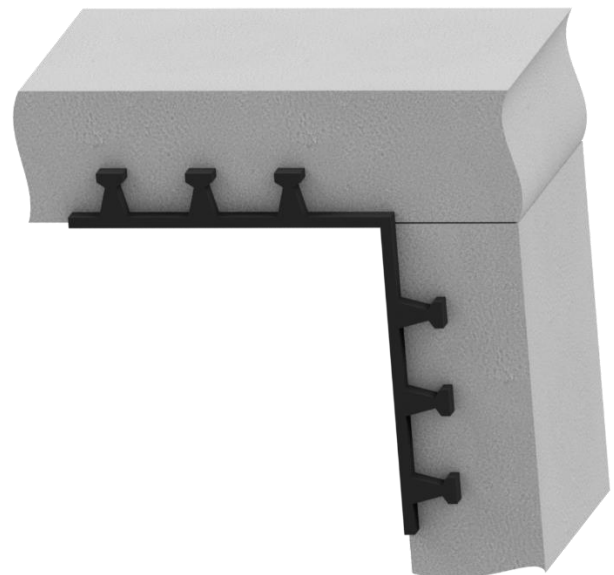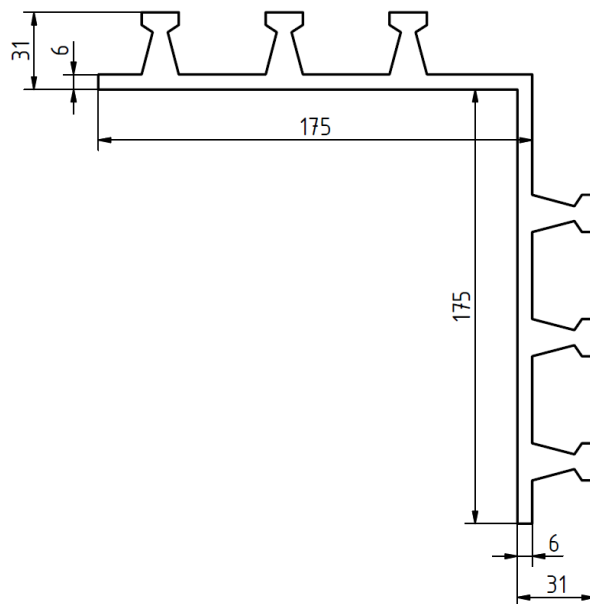

All dimensions in mm