

TECHNICAL DATA SHEET - DISTANSLINJAL ZZ ISO

DESCRIPTION

Distanlinjal ZZ ISO is a linear reinforcement spacer made from frost-resistant, 100% recycled PVC-free plastic. It is used as a reinforcement spacer for bottom reinforcement on soft surfaces in reinforced concrete structures. The wide, zigzag-shaped base ensures excellent stability on the substrate and evenly distributes the weight of the reinforcement.

USAGE

It is placed on soft surfaces with the wide base facing downward against the substrate.

TECHNICAL INFORMATION

Color: Grey

Material: A blend of PVC-free PP and PE (Polyolefin blend)

Concrete cover: 20-70 mm (See stock assortment in the table below)


Length: 2.0 m

Material consumption: 1-1.5 m/m²

c/c: 0.8 m

PROPERTIES

- Made from environmentally friendly and sustainable materials.
- Click-function
- Can be used as a spacer of heavy reinforcement
- Cold-resistant
- Marked with concrete cover
- Large cutouts for maximum concrete flow

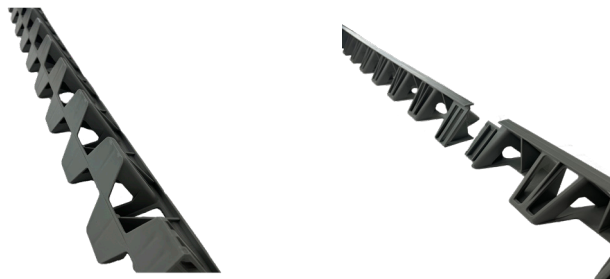

RANGE OF ARTICLES

Item.nr	Description	Height	Length	Bundle	Pallet	Unit
1001081	Distanlinjal ZZ ISO 20	20 mm	2,0 m	100	6000	m
1001082	Distanlinjal ZZ ISO 25	25 mm	2,0 m	100	4800	m
1001083	Distanlinjal ZZ ISO 30	30 mm	2,0 m	50	3150	m
1001084	Distanlinjal ZZ ISO 35	35 mm	2,0 m	50	2400	m
1001085	Distanlinjal ZZ ISO 40	40 mm	2,0 m	50	1750	m
1001087	Distanlinjal ZZ ISO 50	50 mm	2,0 m	50	1200	m
1001088	Distanlinjal ZZ ISO 60	60 mm	2,0 m	40	960	m
1001089	Distanlinjal ZZ ISO 70	70 mm	2,0 m	40	960	m

OTHER INFORMATION



BVB ID
173129



STORAGE

Can be stored indoors or outdoors year-round. Storing in direct sunlight for extended periods can cause deformation or cracking.