


TECHNICAL DATASHEET - Expansion Joint Connector Hydra FB

PROPERTIES

Expansion joint connector Hydra FB is made out of 1,5 mm thick metal with our Hydra FB coating for superior adhesion to concrete. It's used for creating a water- & radontight passage between metal waterstops and expansion joint tapes.

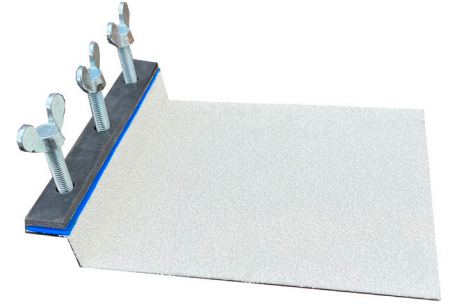

APPLICATION

Expansion joint connector Hydra FB is used for connecting metal waterstop Hydra FB with expansion joint tapes to create a secure and tight passage between the two elements.

TECHNICAL DATA

Lenght metal part (LxB)	180x150 (mm)
Flange (HxDxB)	25x20x150 (mm)
Thickness	1,5 (mm)
Temperature resistance	-20°C / +70°C

PACKAGING & STORAGE


Expansion joint connector Hydra FB must be stored in a dry place. It has to be protected against mechanical damage.

INSTALLATION

Expansion joint connector is simply flanged to the metal strap or the PVC of the expansion joint waterstop with the three wing nuts. On the other side the metal waterstop is adhered to the connecting surface of Expansion joint connector device and securely fixed with fixing clips. Alternatively the metal waterstop can also be overlapped with the hydrophilic covered connecting surface of Expansion joint connector device and once again securely fixed with fixing clips.

ACCESSORIES

Item no: 1141009 Expansion joint connector Hydra FB

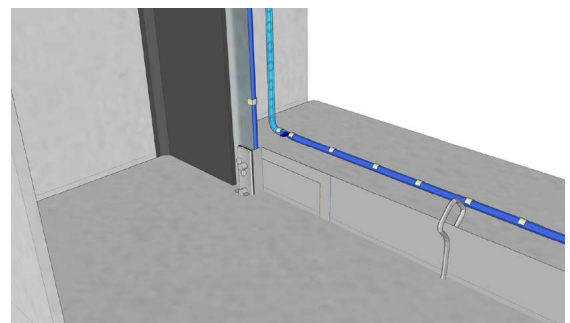

We reserve the right for printing errors and refer to the fact that the current version of the data is always available at www.hydratec.se or can be requested by contacting our office. Current revision number is in the top left corner.